

Tropospheric Trace Species Sensing FPI—Airborne System Development

ALLEN M. LARAR, WILLIAM B. COOK, CARL S. MILLS, MICHAEL A. FLOOD
NASA Langley Research Center
Hampton, VA 23681
UNITED STATES OF AMERICA

JEFFERY J. PUSCHELL
Raytheon Space and Airborne Systems
2000 East El Segundo Blvd., EO/E01/C150
El Segundo, CA 90245-0902
UNITED STATES OF AMERICA

WILBERT R. SKINNER
Space Physics Research Laboratory
University of Michigan
Ann Arbor, MI 48109
UNITED STATES OF AMERICA

Abstract: - The Tropospheric Trace Species Sensing Fabry-Perot Interferometer (TTSS-FPI) is a NASA Instrument Incubator Program (IIP) project for risk mitigation of enabling concepts and technologies applicable to future Office of Earth Science (OES) atmospheric chemistry measurements. While the intended implementation for future science missions is a geostationary-based measurement of tropospheric ozone and other trace species, an airborne sensor is being developed within IIP to demonstrate the instrument concept and enabling technologies that are also applicable to space-based configurations. The concept is centered about an imaging Fabry-Perot interferometer (FPI) observing a narrow spectral interval within the strong 9.6 micron ozone infrared band with a spectral resolution $\sim 0.07 \text{ cm}^{-1}$. This concept is also applicable to and could simplify designs associated with atmospheric chemistry sensors targeting other trace species (which typically require spectral resolutions in the range of $0.01 - 0.1 \text{ cm}^{-1}$), since such an FPI approach could be implemented for those spectral bands requiring the highest spectral resolution and thus simplify overall design complexity. The measurement and instrument concepts, enabling technologies, approach for development and demonstration within IIP, and a summary of progress-to-date are all reported.

Key-Words: -atmospheric chemistry, ozone, remote sensing, Fabry-Perot interferometer

1 Introduction

Measurement of tropospheric chemistry is identified as one of the key areas to be included in Earth science missions of the 21st century in the NASA Office of Earth Science (OES) Strategic Enterprise and Science Research Plans.

While many species are fundamental to enabling atmospheric chemical processes, ozone is clearly recognized as one of the most important gas phase trace constituents in the troposphere. Its importance stems from three main roles. Ozone is a key oxidant in tropospheric photochemistry;

ozone photolysis is one of the principal sources of the hydroxyl radical (OH), which is the most important radical species associated with the photochemical degradation of anthropogenic and biogenic hydrocarbons. Exposure to enhanced levels of tropospheric ozone [1]-[2] negatively impacts health, crops, and vegetation; ozone is responsible for acute and chronic health problems in humans and contributes toward destruction of plant and animal populations. As a greenhouse gas, ozone contributes toward radiative forcing and climate change. The objective of the Tropospheric Trace Species Sensing Fabry-Perot Interferometer (TTSS-FPI) within NASA's Instrument Incubator Program (IIP) is to develop and demonstrate an airborne sensor to further the development of an advanced atmospheric remote sensor intended for geostationary-based measurement of tropospheric ozone and other trace species.

2 Technical Approach

Observations of tropospheric trace species face two fundamental challenges: 1) the need for sufficient spatial resolution to identify the spatial distribution inhomogeneities of constituents that result from non-uniform sources/sinks and atmospheric transport, and 2) the need for adequate temporal resolution to resolve daytime and diurnal variations. Both of these requirements are ideally fulfilled by observation from geostationary orbit. While differential absorption lidar and other active sounding systems operating from low Earth orbit could permit high vertical resolution, they would only provide relatively sparse horizontal spatial sampling. The Tropospheric Emission Spectrometer (TES) instrument on the NASA EOS-Aura satellite is expected to provide the first global data set on distribution of tropospheric ozone. However, the EOS Request for Information panel has recommended technology development to achieve higher horizontal resolution than is possible with the EOS-AURA payload [3]-[4]. This new technology would address the key tropospheric ozone process-related questions that are expected to remain in the post-AURA time period.

Earlier NASA-sponsored research [5] has shown that a tropospheric ozone measurement capability can be achieved using a satellite-based nadir-viewing device making high spectral resolution measurements with high signal-to-noise ratios, and that a Fabry-Perot interferometer (FPI) is quite suitable for this task. Implementation in the infrared portion of the spectrum utilizes the strong 9.6 micron ozone band and yields continuous day/night coverage independent of solar zenith angle. Using an FPI affords high optical throughput while operating at high spectral resolution, and has a proven success record in previous applications. The same technology being advanced for TTSS-FPI is applicable to measurements of other trace species, and could greatly simplify other atmospheric chemistry sensor designs (which typically require spectral resolutions in the range of $0.01 - 0.1 \text{ cm}^{-1}$) by means of relatively simple FPIs that measure only spectral bands requiring the highest spectral resolution in those applications thereby reducing overall design complexity.

A geostationary-based implementation is ultimately desired for this concept for the many operational benefits it enables, including:

- higher spatial and temporal resolution than low Earth orbit (LEO)
- species source/sink identification and atmospheric transport characterization
- quick repeat views to study regional pollution episodes on mesoscale meteorological time and space scales
- viewing of same surface region throughout day/night which allows separating surface, troposphere and stratosphere variability (i.e. from temporal characteristics in addition to spectral)
- viewing the same scene as a function of surface/lower atmosphere thermal contrast variations (ensuring scene views during maximum thermal contrast, and thus minimum retrieval error, conditions)
- maximizing the likelihood of cloud-free views of any given location, and optimizing the ability for cloud removal for any given time (i.e. having high spatial resolution views of nearest neighbors, which may be cloud-free).

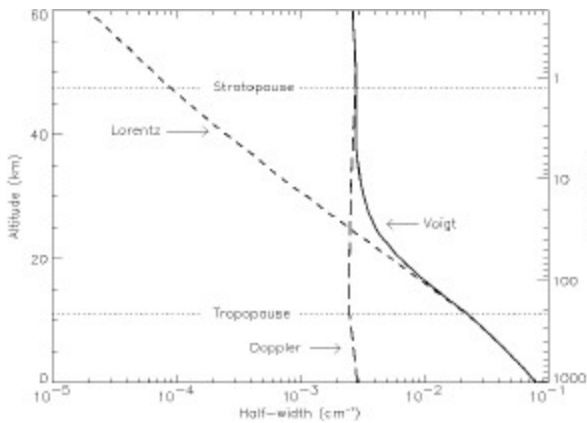


Figure 1. Approximate altitude dependence from 0 to 60 km of Lorentz, Doppler, and Voigt half-widths.

2.1 Measurement Concept

Molecular collisions during the absorption/emission process give rise to collisional or pressure broadening, and the corresponding profile function can be represented by the Lorentz line shape. The Lorentz half-width is proportional to pressure and is approximately inversely proportional to the square root of temperature. The other significant mechanism for broadening in the terrestrial atmosphere is Doppler broadening, which originates from a Doppler shift in the frequency of radiation associated with the absorption/emission feature due to thermal motion of the radiating molecules. Unlike the Lorentzian half-width, the Doppler half-width does not have pressure dependence and therefore its change with altitude is due to temperature alone. The Voigt profile is formed from convoluting two independent broadening formulas (i.e., Lorentzian and Doppler) and in high or low pressure limits approaches Lorentz or Doppler profiles, respectively. Figure 1 illustrates the approximate Lorentz, Doppler, and Voigt half-widths as a function of altitude for ozone lines within the 9.6 micron band using reasonable surface values for Lorentz and Doppler half-widths [6] and Lorentz half-width temperature dependence coefficient [7]. The figures shows the basis for this measurement concept: tropospheric information content in measured signals can be maximized by

spectrally isolating wings of strong ozone lines, since wings of strong lines are due primarily to pressure broadening in the troposphere.

2.2 Instrument Concept

The TTSS-FPI instrument concept employs a double-etalon FPI to achieve the necessary high-resolution (0.068 cm^{-1}), narrow-band infrared emission measurements within the strong 9.6-micron ozone band. This implementation requires a single-order transmission function, rather than the periodic nature of the standard Fabry-Perot instrument bandpass (which can be advantageous when observation of periodic spectra is desired). This is achieved using additional optical elements (specifically, a low resolution etalon, LRE, a high resolution etalon, HRE, and an ultra-narrow bandpass filter all arranged in a series configuration) to reduce the effect of unwanted passbands, improve sideband rejection, and extend the effective free spectral range. Figure 2 summarizes the formation of a single-order, double-etalon instrumental transfer function from the Airy (A), defect (D), aperture (L), and bandpass filter (T_F) functions. Larar et al. [8] describe such a system for a cross-track spatially scanning non-imaging instrument configuration. The system being advanced herein incorporates an advanced focal plane array (FPA) detector to perform spatial imaging, and spectral tuning is accomplished through precise mechanical scanning of etalon plate gaps; Larar et al. [9] describe such a system for geostationary implementation.

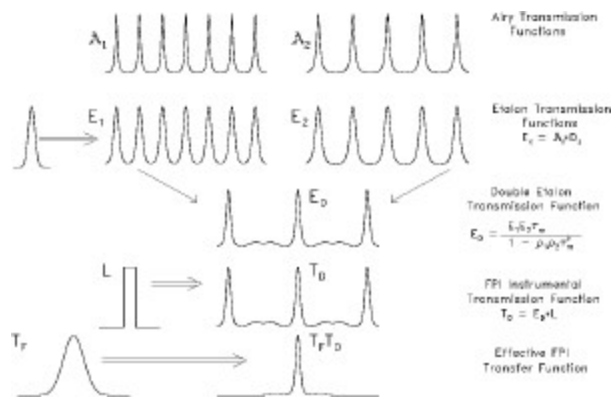


Figure 2. Schematic diagram summarizing the formation of a single-order, double-etalon instrumental transfer function.

2.3 Enabling Technologies

The instrument system is an imaging Fabry-Perot interferometer (FPI) based on a tunable double etalon designed to collect high resolution ($R \sim 15000$) spectra of the Earth/atmosphere in the 9.6 micron ozone band over an infrared FPA. Spectral information is acquired by taking a series of images at different FPI plate separation distances. As the FPI is scanned, each pixel measures a signal that represents the convolution of the instrument transfer function with the spectrum incident at that pixel location. For each plate separation setting, slight differences in effective center wavelength occur as a function of exact pixel location, because the surfaces of equal phase difference are curved, not flat like the focal plane array. Thus the FPI needs to be scanned beyond the spectral range required for field center to ensure all spatial elements in the three-dimensional spatial-spectral data set have complete spectral coverage. To enable the spectrally tunable imaging FPI measurement technique needed for TTSS-FPI, for achieving high-resolution over narrow spectral ranges, three enabling technologies will be demonstrated within IIP:

1. precision control of etalon plates to demonstrate accurate spectral tuning and parallelism control of the LRE and HRE;
2. high-sensitivity two-dimensional infrared detector arrays to demonstrate the required SNR and imaging configuration; and
3. spectral and radiometric calibration, to demonstrate spectral registration and absolute intensity fidelity in radiance measurements.

2.3.1 Precision Etalon Control

A key feature of this measurement concept is the optical performance and spectral tuning of the FPI, which is achieved by controlling the spacing and parallelism between the etalon plates. Alignment/tuning of the etalon plates during the aircraft prototype demonstration employs a piezoelectric actuator-based technique, a low power system that is scalable to the optimum performance and versatility desired for a space-based Fabry-Perot interferometer.

2.3.2 High Sensitivity 2-D Infrared Detector Arrays

A top priority of the airborne prototype design phase has been to perform a trade study to simultaneously specify the pre- and post-optics configurations, the instrument FOV, integration times, and spectral bandwidth to be required: all of these parameters are dependent upon available detector array characteristics. The key to a low cost subsystem is avoidance of design and small-lot manufacturing costs by relying on off-the-shelf products, commercial products, and spares from other programs whenever possible. Accordingly, this project was very fortunate to acquire a pair of detector arrays via a loan agreement with Raytheon. These arrays, developed under Raytheon IR&D funding, provide excellent performance for this airborne sensor at our target 40K FPA operating temperature.

2.3.3 Calibration

Measured data need to be calibrated in radiance, phase and wavelength. The radiometric calibration for every element in the spatial-spectral datacube is derived by measuring apparent signal as a function of FPI plate separation from the onboard blackbody sources. From these measurements, gain and offset for each datacube element can be calculated. To improve SNR of the calibration spectra, reference scans can be averaged together.

The phase correction accounts for variation in center wavelength as a function of pixel location for a given FPI setting. For any off-axis pixel located at (x,y) in the array, a given wavelength, λ_0 , with maximum transmission on-axis for some gap setting, z_0 , has maximum transmission at a different FPI gap setting, $z_0+p(x,y)$. The array of values describing this difference in gap setting, $p(x,y)$, is called the phase map. This array can be determined by illuminating the spectrometer with a monochromatic light source such as a laser and then collecting a series of spectral images across the full Nyquist-sampled FPI scan. The phase map obtained with this method is independent of wavelength and therefore can be applied to all spectral channels. After the phase map has been determined, wavelength calibration can be obtained. The most straightforward method is to

scan across two different spectral features and then solve for etalon spacing at each position. This requires two very narrow spectral features in the atmospheric spectrum or view of an internal monochromatic calibration source. Another approach is to use a laser metrology system to measure plate separation very accurately and require only one spectral reference to determine the wavelength calibration. For this airborne sensor, we intend to perform radiometric calibration using two on-board blackbody calibration sources and use views of an on-board calibration (CO₂) gas cell for spectral calibration.

2.3.4 Optics & Electronics

The optical bench supports the pre-optics, the etalons, and the focusing optics and is mated to the detector housing. The instrument optics are cooled via thermal connection of the optical bench to liquid nitrogen/helium reservoirs within a Dewar. Avoiding condensation necessitates evacuation of the dewar placed around the bench since the instrument would otherwise come into contact with water vapor during the flight. The bench is maintained at a constant temperature at or below 170 K. This evacuation and cooling closely simulates the space-based environment, although the liquid cryogen would be replaced with passive radiators and, if needed, active coolers. Suitable orbital temperature control technology already exists and is used frequently on spacecraft; hence our cryogen-based system is easily scaled to space while lessening the cost of this demonstration project. The optical components are primarily coated ZnSe lenses and/or gold-coated mirrors. A collector, field lens, and collimator are the major components in the pre-optics. This arrangement maintains wavelength/viewing-angle information contained in the Fabry-Perot transfer function, as desired for a spatially-imaging device.

Flight electronics consist of a signal power conditioning deck, an etalon control deck, a detector array power deck, a detector array data deck, a temperature control deck, a mechanical/blackbody source control deck, and a standard PC-based flight computer. Off-the-shelf control electronics for the alignment laser are re-packaged for the aircraft prototype. Wherever possible existing designs for these

cards are being used, thus providing some leveraging of our project by some of the ongoing work at LaRC, Raytheon and UM/SPRL.

2.4 Airborne System Implementation

Approach

Accurate ozone retrievals require concurrent knowledge of atmospheric temperature and water vapor along with surface characteristics (i.e. temperature and emissivity). Such geophysical information can be easily obtained from infrared spectral radiance measurements acquired with, for example, a lower-resolution FTS system using currently available technology. While our IIP demonstration objectives for this sensor can be accomplished acquiring these ancillary data products from other readily available sources (i.e. GOES products, radiosonde profiles, surface calibration site data, etc.), we will obtain such desired data by flying jointly with the NPOESS Airborne Sounder Testbed-Interferometer (NAST-I) instrument [10]. Besides being a cost-effective approach by piggy-backing on a NAST-I flight of opportunity, a greatly-enhanced combined data set will result.

The next logical step in advancing and validating this measurement technique is performing atmospheric measurements from a more realistic configuration (i.e. making nadir-viewing emission observations). This would address several critical operational challenges associated with this measurement; most importantly, signal impact from background (surface) variability of temperature, emissivity, and topography. Within IIP we will demonstrate an integrated instrument system from an airborne platform to provide technique validation, demonstration of enabling components within an integrated system, the utility of the imaging technique and evaluate FPA small/large format tradeoffs, and autonomous operation, all from a more relevant environment than possible from the ground. Subsequent atmospheric test flights will be a crucial risk-mitigating activity for the eventual spaceflight instrument by validating enabling technologies and providing additional measurement concept verification.

Within IIP we will demonstrate this FPI device with a lower-resolution advanced sounder Fourier Transform Spectrometer (FTS) sensor measuring spectra concurrently from the same airborne platform. Specifically, we intend to have piggyback flights with the NAST-I sensor aboard the high-altitude Proteus aircraft [11]-[12]. NAST is a suite of airborne infrared and microwave spectrometers developed for the NPOESS Integrated Program Office (IPO) that has been flown on the high altitude NASA ER-2 and Northrop Grumman Proteus aircraft as part of the risk reduction effort for NPOESS (i.e., the NPOESS Cross-track Infrared Sounder (CrIS) and the Advanced Technology Microwave Sounder (ATMS)). The NAST-I is a Michelson interferometer that derives its heritage from the non-scanning High resolution Interferometer Sounder (HIS) developed by researchers at the University of Wisconsin [13]. It scans the Earth beneath the aircraft with a nominal spatial resolution of approximately 2.5 km within a cross-track swath width of about 45 km; its unapodized spectral resolution is 0.25 cm^{-1} within the 3.6 - 16.1 micron spectral range. NAST-I is a scientifically-sound sensor that has flown ~130 missions for ~740 flight hours. Flights concurrent with NAST-I enable temperature and water vapor profiles along with surface characteristics (i.e., temperature and emissivity) to be implemented into the TTSS-FPI ozone retrieval; additionally, a lower-resolution observation of the entire ozone band is available for cross-calibration verification. Figure 3 illustrates the concept behind this piggyback demonstration flight.

3 Airborne System Development Status

All instrument enabling components have been specified and most have already been procured; items not already in-hand are on order with delivery expected by mid-summer 2004. Integration activities will begin upon receipt of the Dewar, which serves as the instrument external canister and thermal control subsystem, and subsequently enables system-level testing and characterization. Several months will likely be needed to complete instrument integration,

calibration and characterization activities. The project expects this system to be flight-ready and awaiting its airborne flight opportunity during the fall of 2004.

Several risk mitigating activities have been ongoing while the project awaits completion of critical sensor component procurements. These include the following: integration of the flight computer; development of flight computer (LabVIEW) software for etalon control and data acquisition; vibration testing of etalon mounting fixtures; and development of FPA Data Processing Electronics to perform near-real-time pixel binning and frame averaging. Also, substantial progress has already been made on a spaceflight instrument concept definition, an intended project deliverable, which is awaiting airborne sensor characterization and performance data for completion.

Integrated Sensor Demonstration Approach -piggyback flight with validated airborne sounder

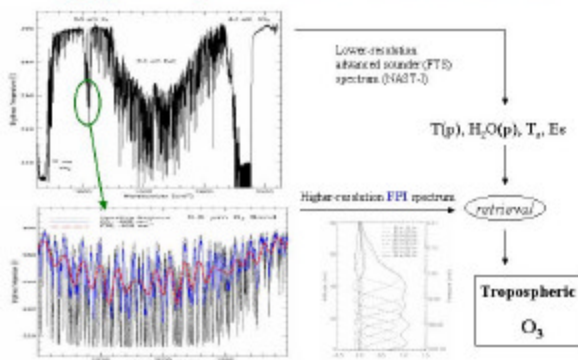


Figure 3. Integrated sensor demonstration approach for TTSS-FPI within IIP.

4 Summary

Tropospheric ozone is a high-priority measurement identified in the NASA Office of Earth Science (OES) Strategic Enterprise and Science Research Plans. The airborne FPI system (TTSS-FPI) described herein would demonstrate a new measurement capability intended for “direct” geostationary Earth orbit (GEO)-based observation of tropospheric ozone. The concept exploits spatial and temporal

benefits obtainable from a GEO-based imaging system, for example, monitoring of regional pollution episodes. The instrument concept and technologies are also applicable to measurement of other important atmospheric trace species. The science justification for pursuing this capability along with the concepts behind the measurement and instrumentation has been described. Also, the approach for development and demonstration of this airborne system within NASA's Instrument Incubator Program has been discussed.

References:

- [1] A. Volz, and D. Kley, "Evaluation of the Montsouris series of ozone measurements made in the nineteenth century", *Nature*, Vol. 332, 1988, pp. 240-242.
- [2] J. Fishman, C. E. Watson, J. C. Larsen, and J. A. Logan, "Distribution of Tropospheric Ozone Determined from Satellite Data", *J. Geophys. Res.*, Vol. 95, 1990, pp. 3599-3617.
- [3] *Summary Of Discipline Panel Reviews of the Request for Information (RFI) Responses Concerning Mission Concepts in the Post-2002 Era, Research Division, Office of Earth Science, NASA Headquarters, Aug. 5, 1998a.*
- [4] *ESE Mission Scenario for the 2002-2010 Period, Research Division, Office of Earth Science, NASA Headquarters, Aug. 10, 1998b.*
- [5] A. M. Larar, "*The Feasibility of Tropospheric and Total Ozone Determination Using a Fabry-Perot Interferometer as a Satellite-Based Nadir-Viewing Atmospheric Sensor*", Ph.D. thesis, Univ. of Michigan, 1993.
- [6] W. R. Kuhn and J. London, "Infrared radiative cooling in the middle atmosphere (30-110 km)", *J. Atmos. Sci.*, Vol. 26, 1969, pp. 189-204.
- [7] L. S. Rothman, R. R. Gamache, A. Goldman, and L. R. Brown, R. A. Toth, H. M. Pickett, R. L. Poynter, J. -M. Flaud, C. Camy-Peyret, A. Barbe, N. Husson, C. P. Rinsland, and M. A. H. Smith, "The HITRAN database: 1986 edition", *Appl. Opt.*, Vol. 26, 1987, pp. 4058-4097.
- [8] A.M. Larar, P.B. Hays, and S.R. Drayson, "Global tropospheric and total ozone monitoring using a double-etalon Fabry-Perot interferometer. I: Instrument concept," *Appl. Opt.*, Vol. 37, 1998, pp. 4721-4731.
- [9] A.M. Larar, W.A. Roettker, J.J. Puschell, and W. B. Cook, "Fabry-Perot Interferometer for Geostationary-based Observations of Tropospheric Ozone," *Proceedings from the SPIE Optical Spectroscopic Techniques and Instrumentation for Atmospheric and Space Research III, Conference, Denver, CO, vol. 3756, 1999.*
- [10] Smith, W., A. Larar, D. Zhou, C. Sisko, J. Li, B. Huang, H. Howell, H. Revercomb, D. Cousins, M. Gazarik, D. Mooney, and S. Mango, "NAST-I: Results from Revolutionary Aircraft Sounding Spectrometer," *Proceedings from the SPIE Optical Spectroscopic Techniques and Instrumentation for Atmospheric and Space Research III, Conference, Denver, CO, vol. 3756, 1999.*
- [11] Aviation Week & Space Technology, October 5, 1998, pp. 103-104.
- [12] <http://www.scaled.com>
- [13] W.L. Smith, H.E. Revercomb, H.B. Howell, and H.M. Woolf, "HIS-A Satellite Instrument to Observe Temperature and Moisture Profiles with High Vertical Resolution," *Fifth Conference on Atmospheric Radiation (American Meteorological Society, Boston) 1983.*